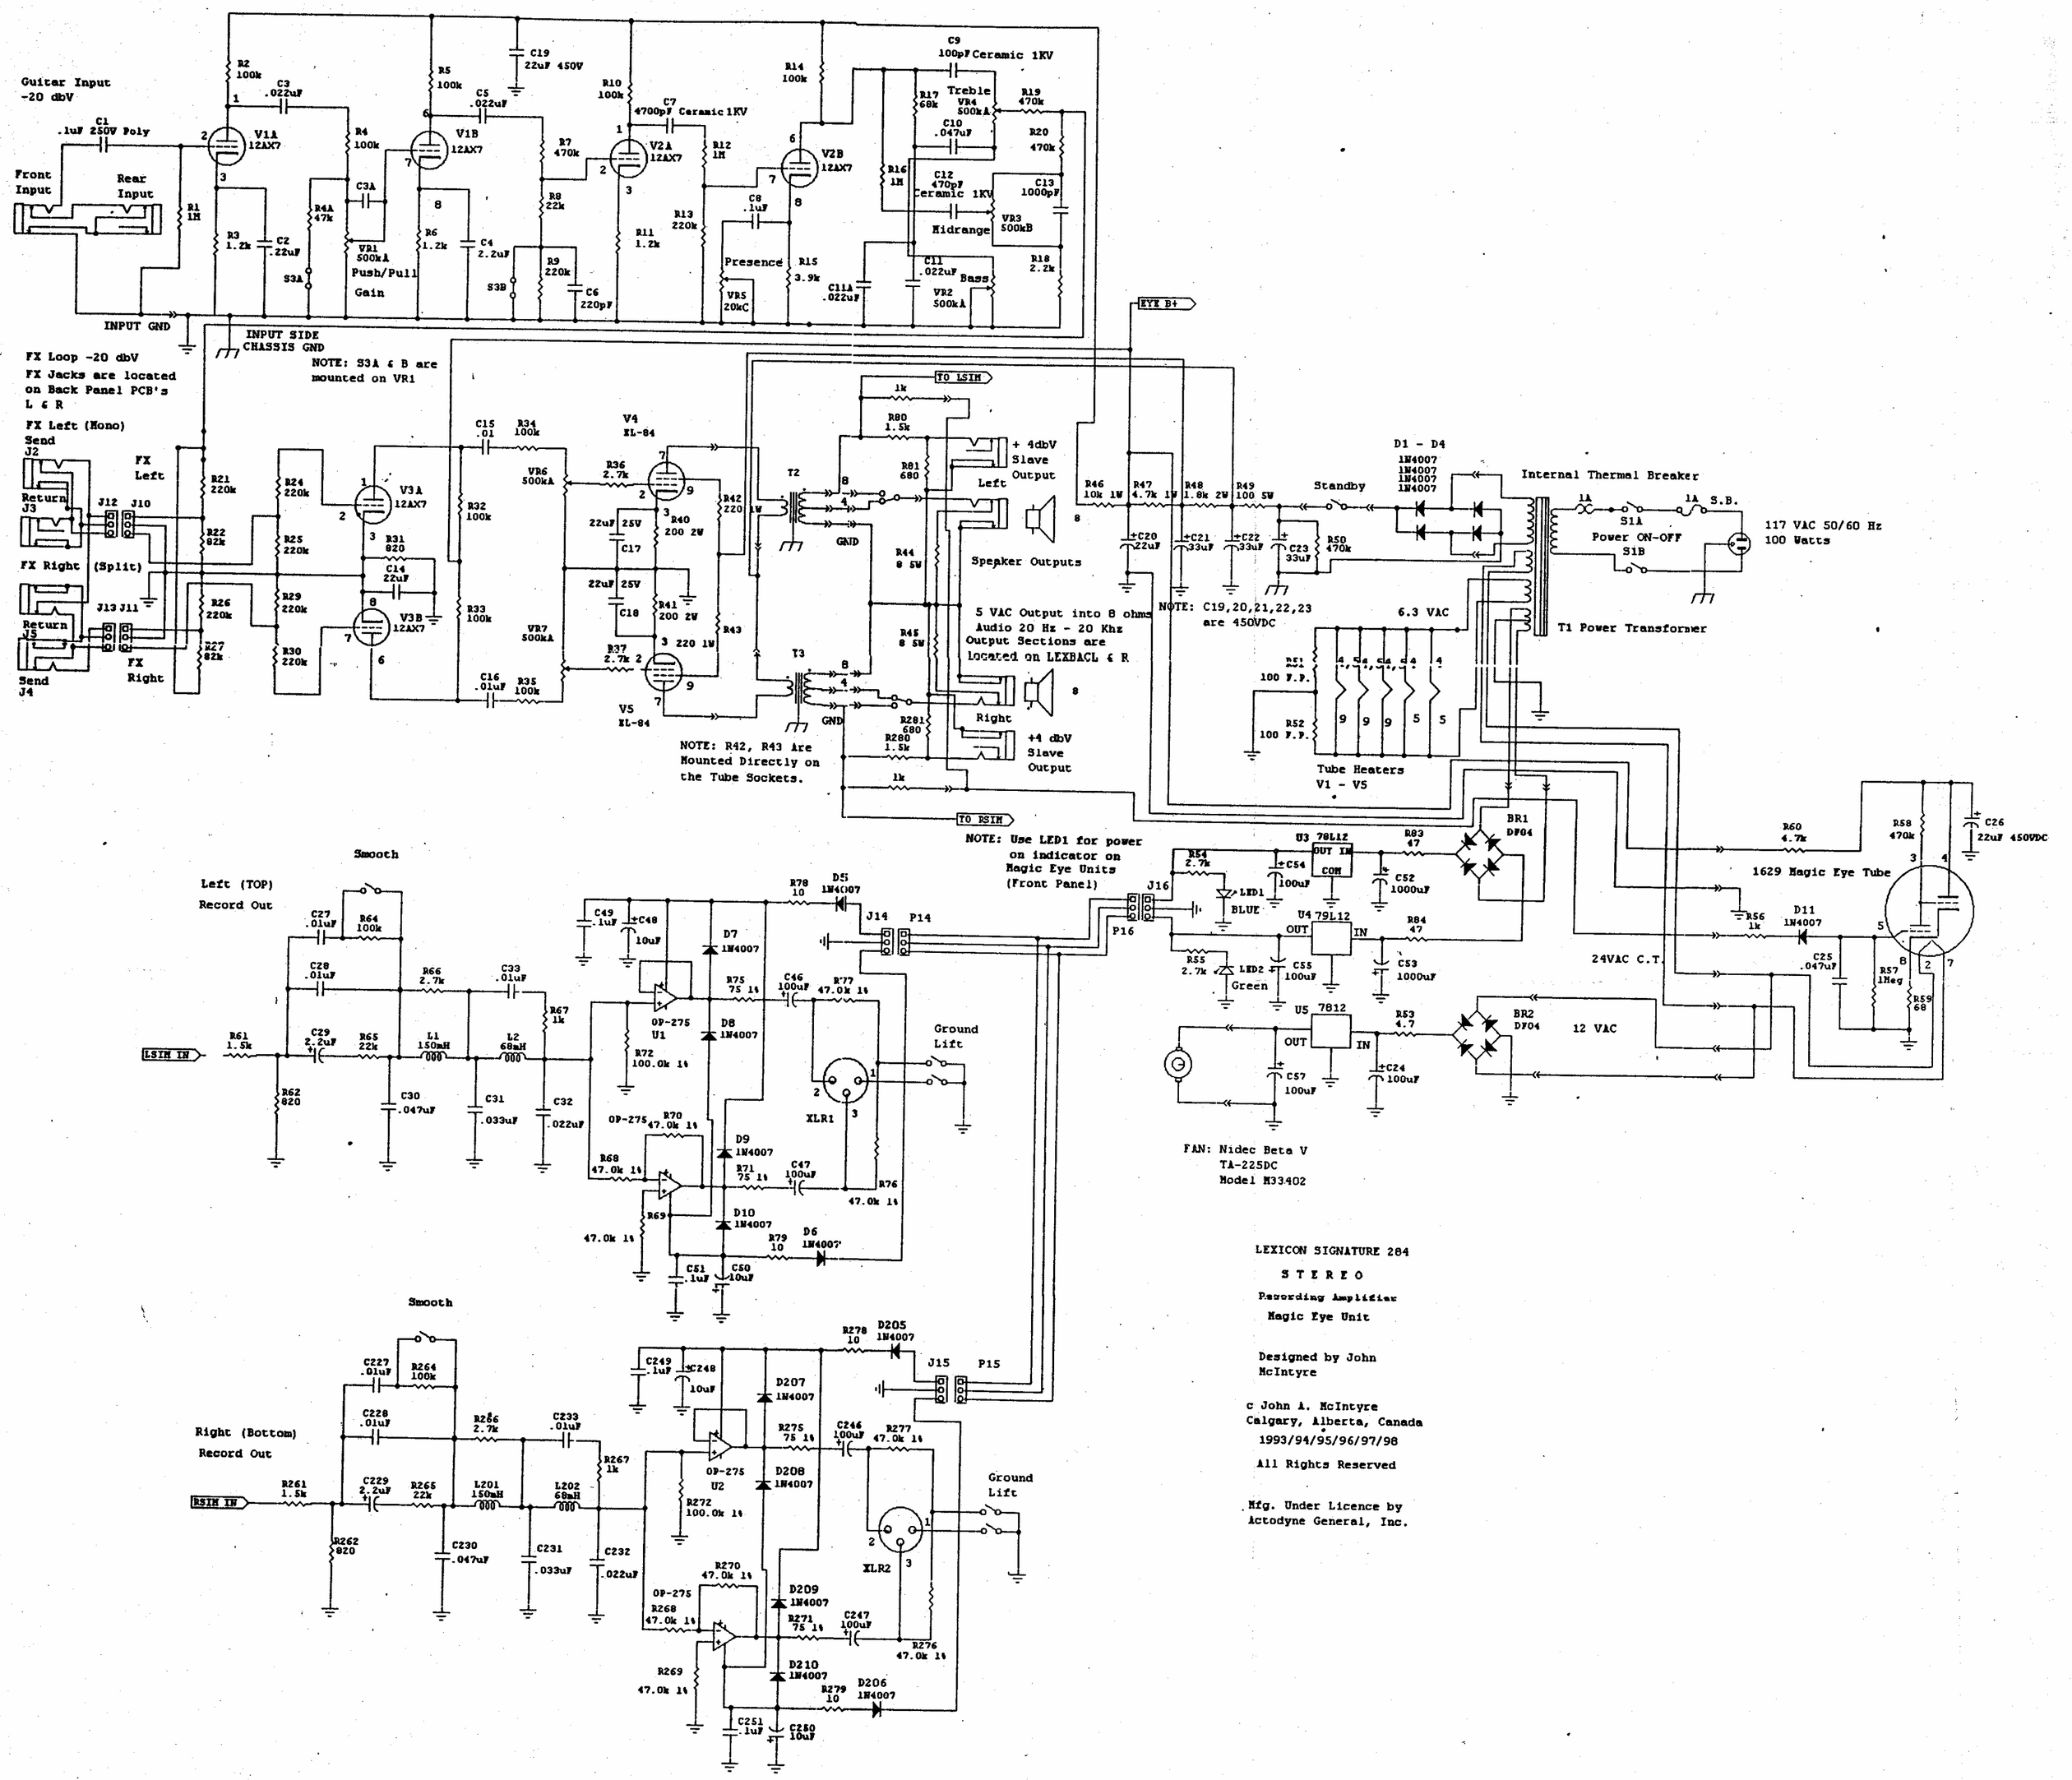

Guitar Input
-20 dbV
Front Input
Rear Input
INPUT GND
INPUT SIDE CHASSIS GND
NOTE: S3A & B are mounted on VR1
Push/Pull
Gain
Presence
Treble
Midrange
Bass
FX Loop -20 dbV
FX Jacks are located on Back Panel PCB's L & R
FX Left (Mono) Send
FX Left
Return
FX Right (Split)
FX Right
Send
TO LSIM
TO RSIM
+ 4dbV Slave Output Left
Speaker Outputs
5 VAC Output into 8 ohms Audio 20 Hz - 20 Khz Output Sections are located on LEXBACL & R
+4 dbV Slave Output Right
NOTE: R42, R43 are Mounted Directly on the Tube Sockets.
NOTE: Use LED1 for power on indicator on Magic Eye Units (Front Panel)
EYE B+
Standby
Internal Thermal Breaker
Power ON-OFF
117 VAC 50/60 Hz 100 Watts
T1 Power Transformer
6.3 VAC
Tube Heaters V1 - V5
NOTE: C19,20,21,22,23 are 450VDC
D1 - D4 1N4007
1629 Magic Eye Tube
24VAC C.T.
12 VAC
Smooth
Left (TOP) Record Out
Right (Bottom) Record Out
LSIN IN
RSIN IN
Ground Lift
FAN: Nidec Beta V
TA-225DC
Model M33402
LEXICON SIGNATURE 284
STEREO
Recording Amplifier
Magic Eye Unit
Designed by John McIntyre
c John A. McIntyre
Calgary, Alberta, Canada
1993/94/95/96/97/98
All Rights Reserved
Mfg. Under Licence by
Actodyne General, Inc.