
REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	EC 2630	21-MAR-01	dBL

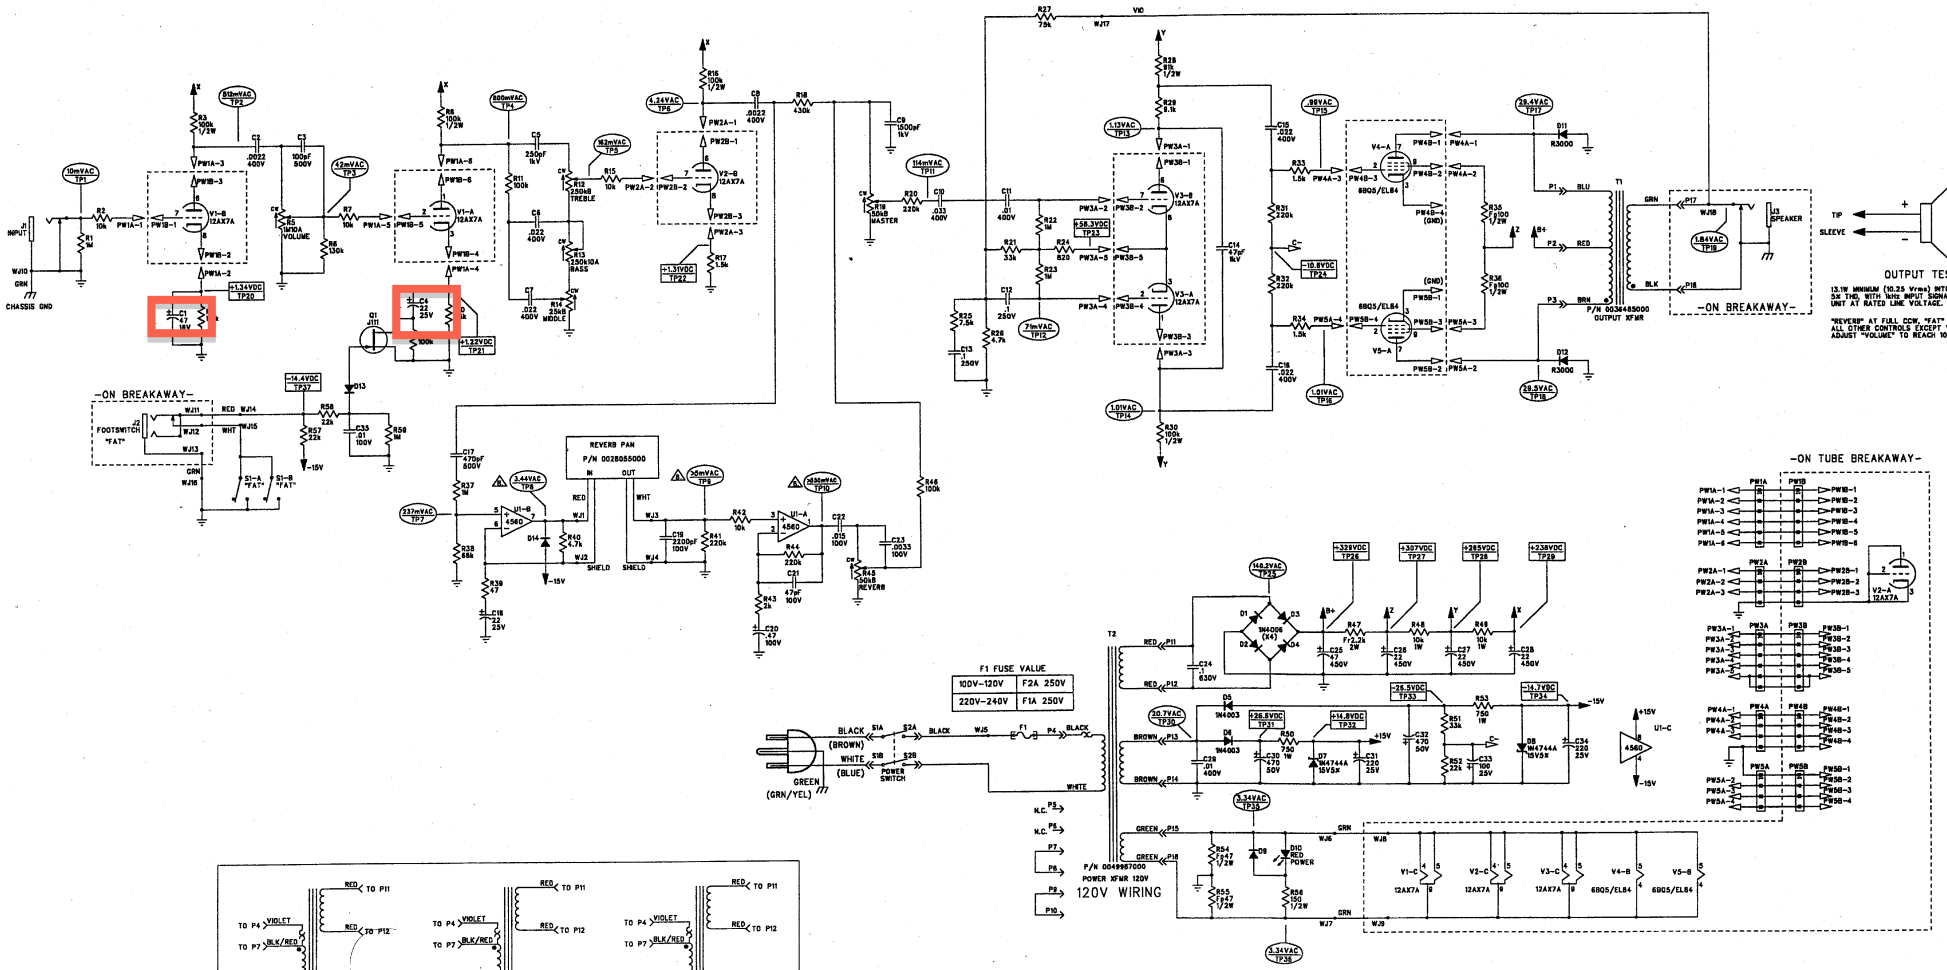

NOTES: (UNLESS OTHERWISE NOTED)

1. ALL RESISTORS IN OHMS, 5%; 1/4W.
2. ALL UNPOLARIZED CAPACITORS IN uF, 10% OR BETTER; 50V MINIMUM. (POWER SUPPLY BYPASS CAPACITORS ARE 20%).
3. ALL POLARIZED CAPACITORS IN uF, 20%; 50V MINIMUM.
4. ALL DIODES ARE 1N4448.
5. THIS SCHEMATIC IS FOR PCB FABRICATION P/N 0057276000 AND PCB ASSEMBLY P/N 0057277000.
6. LAST REFERENCE: C35, D14, F1, J3, P18, R59, S1, T2, TP37, U1, V5, W18.
7. AC AND DC VOLTAGES READ WITH RESPECT TO GROUND WITH A DVM UNDER THE FOLLOWING CONDITIONS:
   UNIT AT RATED LINE VOLTAGE
   NO INPUT SIGNAL (TP20–TP37 ONLY)
   VOLTAGES MAY VARY +/– 20%
   ADDITIONAL CONDITIONS FOR TP1–TP19:
   10mV/rms, 1kHz SINEWAVE INPUT SIGNAL AT J1
   8Ω RESISTIVE LOAD CONNECTED AT J3
   REVERB PAN CONNECTED
   "REVERB" AT FULL CCW, "FAT" SWITCH OUT (OFF)
   ALL OTHER CONTROLS AT 50% ROTATION.

⚠ TP8 – TP19 VARY AND ARE DEPENDENT ON SPECIFIC EXCITATION FREQUENCY AND PARTICULAR REVERB PAN FREQUENCY RESPONSE.

THIS DOCUMENT CONTAINS INFORMATION OF A PROPRIETARY NATURE TO FENDER MUSICAL INSTRUMENTS AND IS SUBMITTED TO YOU IN CONFIDENCE AND SHALL NOT BE DISCLOSED OR TRANSMITTED TO OTHERS WITHOUT AUTHORIZATION FROM FENDER MUSICAL INSTRUMENTS.

Fender® MUSICAL INSTRUMENTS
Corona, CA U.S.A.

CHECKED BY:	
DATE:	23-APR-01
APPROVED BY:	
DATE:	4/20/01
DRAWN: D. LEWIS	ENGR: D. LEWIS
DATABASE FILE:	Z4885.SCH

TITLE: SERVICE DIAGRAM, COMBINED (schematic)
BLUES JUNIOR

SIZE	DRAWING NUMBER	REV.
D	0057275000	A

RELEASE DATE: 21-MAR-01 | SHEET: 1 OF 2