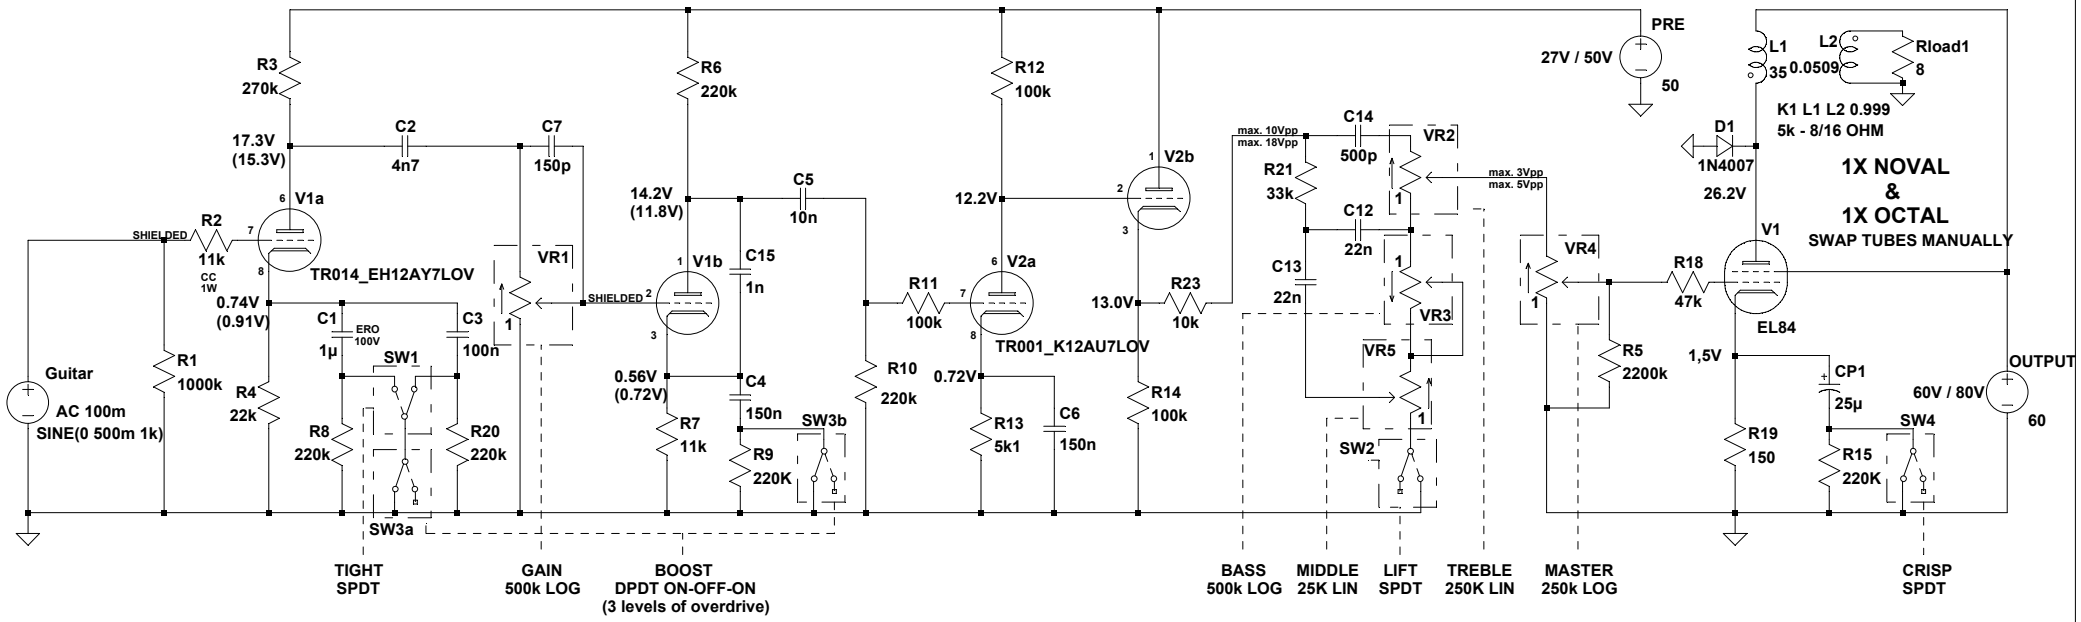
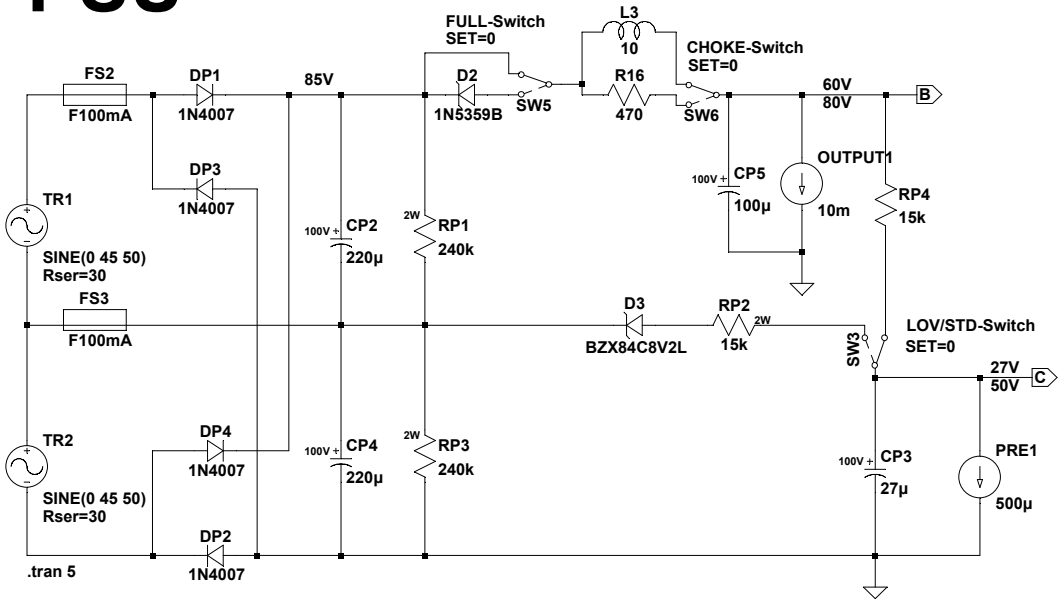
LE MARAIS



PSU



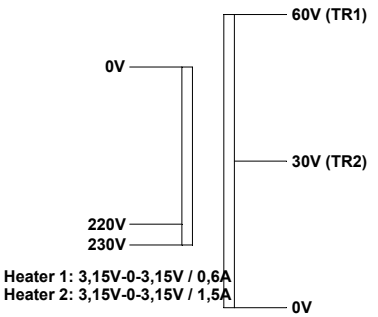

```
SIMUL    ;ac dec 20 100 10k
         .tran 8m
         ;op

GAIN     .param GAIN .5

MASTER   .param MVOL 1

         .param BOOST 1; 1=ON
         .param TIGHT 0 ; 1=ON
TONE     .param LIFT 0; Bypass=1
         .param TREBLE 0.5
         .param MIDDLE 0.5
         .param BASS 0.5
```

DJB30



50mA

Heater 1: 3,15V-0-3,15V / 0,6A
Heater 2: 3,15V-0-3,15V / 1,5A

OUTPUT POWER TARGET:
min. 100mW "CLEAN" WITH LOW VOLTAGE
min. 250mW "CLEAN" WITH HIGHER VOLTAGE

TUBING:
V1 = EH 12AY7
V2 = EH 12AU7
V3 = Octal (6V6 / 6L6...) OR EL84

ALL RESISTORS CARBON COMPOSITION 1/2W
ALL COUPLING CAPS VISHAY MKT1813 400V
UNLESS SPECIFIED

MEASUREMENTS:
- Performed after 5' heat up
- 16 Ohm load resistor
- No input signal
- GAIN & VOL turned to zero
- 100mVpp@1kHz for output measurement

PROJECT: Le Marais		
DESIGN TITLE: CONCEPT DRAWING		
AUTHOR: Laurent	DRAWING NUMBER	REV: 1A
DATE: 2015.09,25	SIZE: A4	SHEET: 1 of 1

--- E:\04-Divers\07- Perso\Guitare\Projects\#13-LeMarais\LeMarais.asc ---