
PENTODEBLASTER

Inspired from Wuff's TimeBomb Designs

BY CH' TI LAMPES

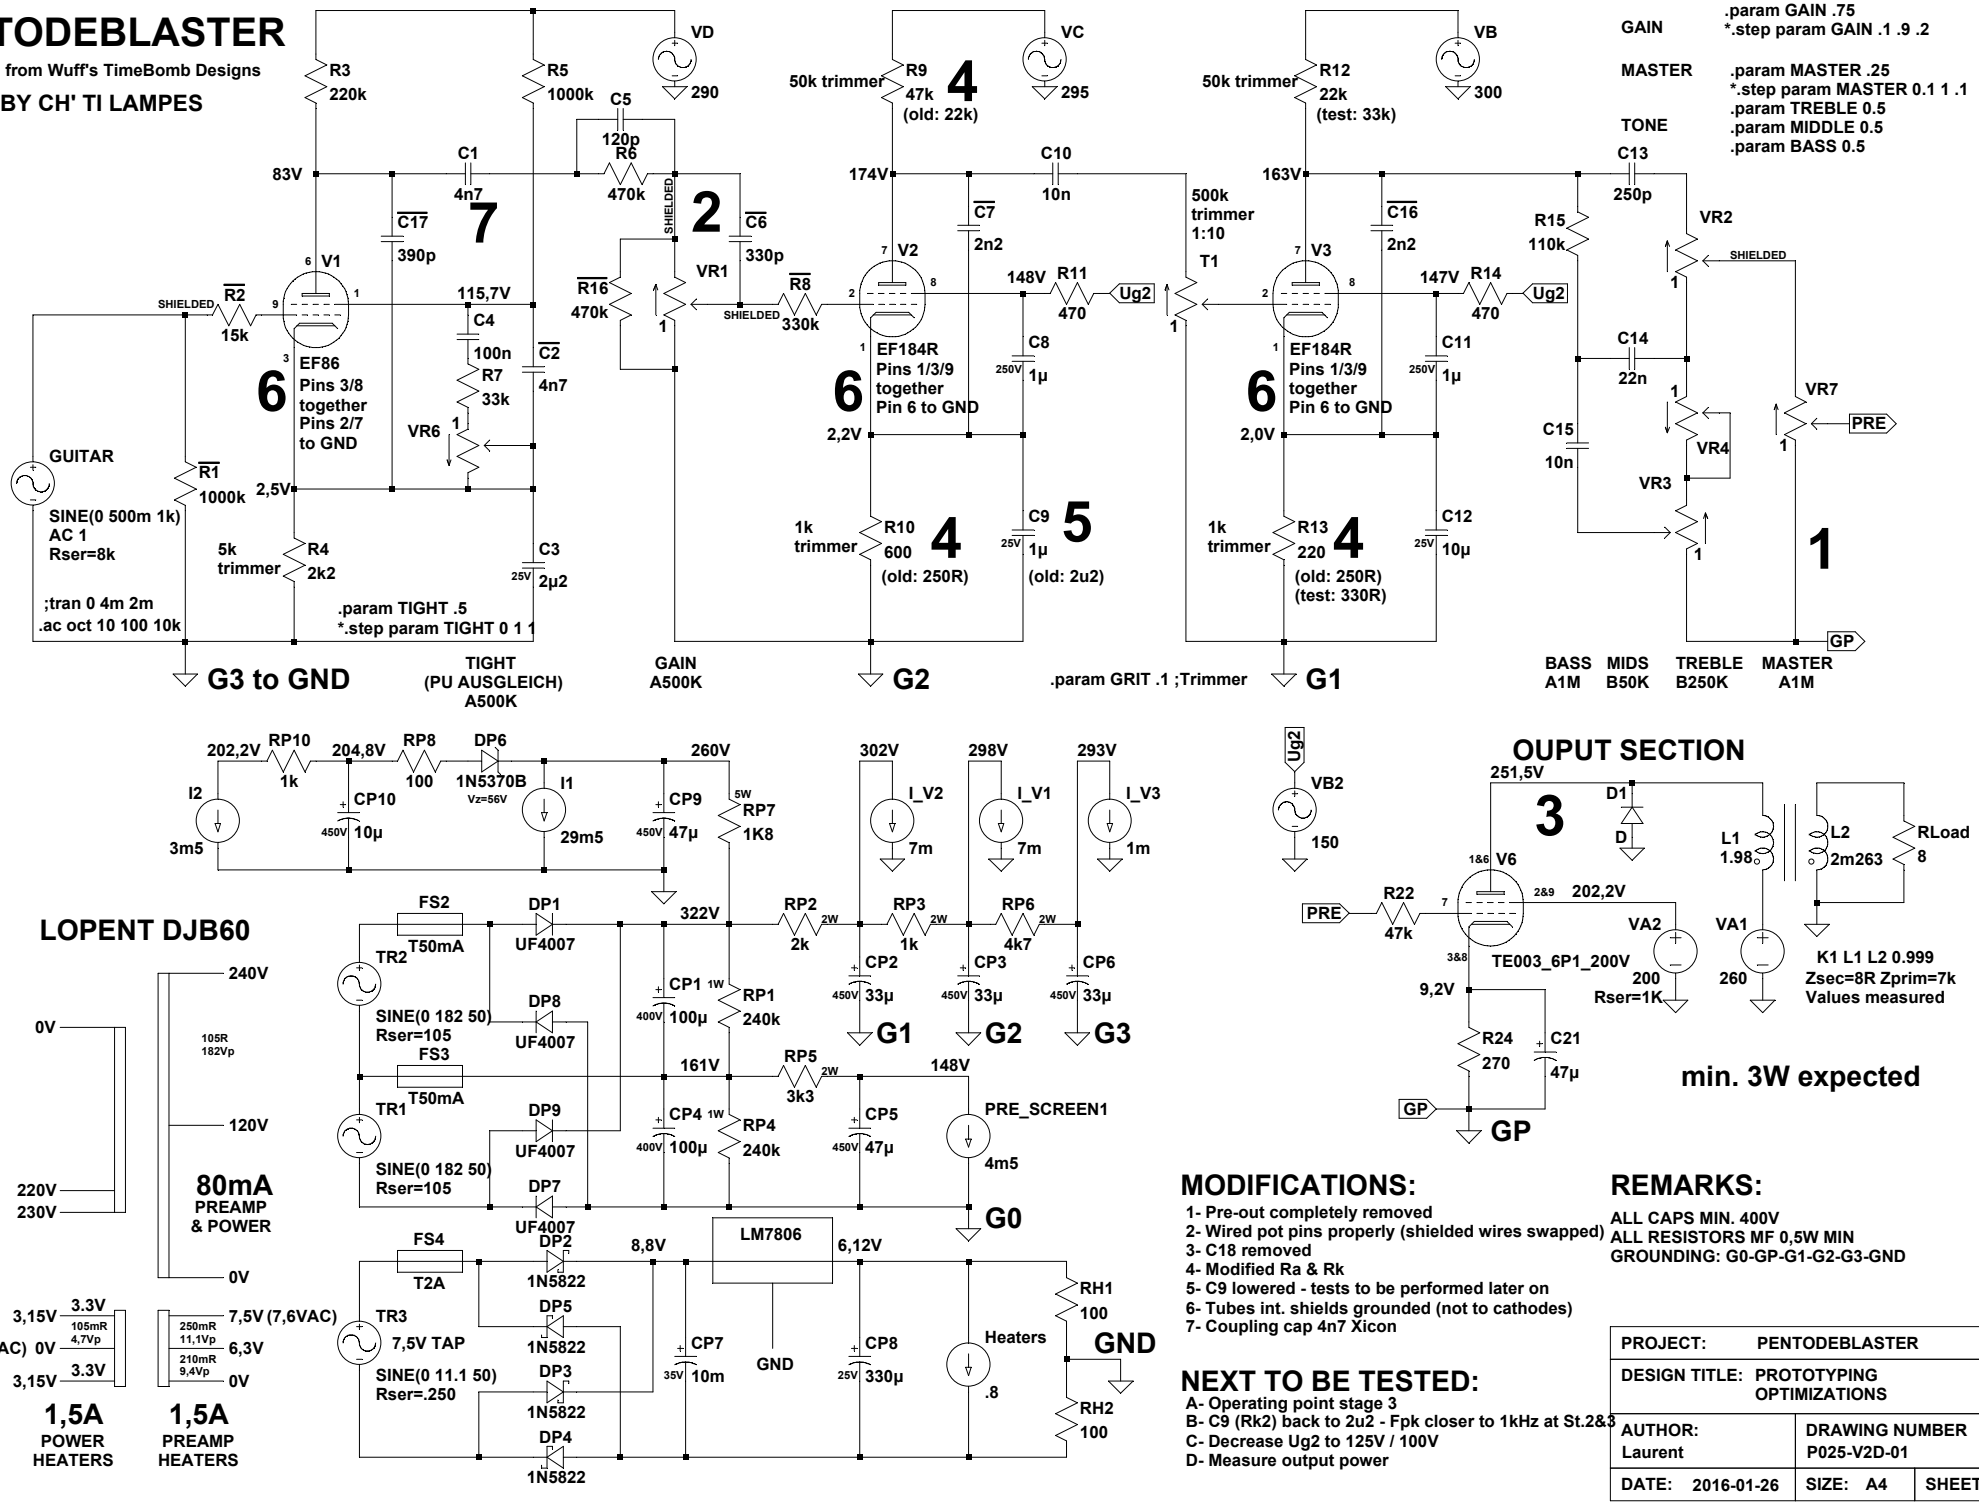

LOPENT DJB60

OUPUT SECTION

min. 3W expected

MODIFICATIONS:

1- Pre-out completely removed
2- Wired pot pins properly (shielded wires swapped)
3- C18 removed
4- Modified Ra & Rk
5- C9 lowered - tests to be performed later on
6- Tubes int. shields grounded (not to cathodes)
7- Coupling cap 4n7 Xicon

REMARKS:

ALL CAPS MIN. 400V
ALL RESISTORS MF 0,5W MIN
GROUNDING: G0-GP-G1-G2-G3-GND

NEXT TO BE TESTED:

A- Operating point stage 3
B- C9 (Rk2) back to 2u2 - Fpk closer to 1kHz at St.2&3
C- Decrease Ug2 to 125V / 100V
D- Measure output power

PROJECT: PENTODEBLASTER		
DESIGN TITLE: PROTOTYPING OPTIMIZATIONS		
AUTHOR: Laurent	DRAWING NUMBER P025-V2D-01	REV: V2E
DATE: 2016-01-26	SIZE: A4	SHEET: 1 of 1

--- E:\04-Divers\07- Perso\Guitare\Projects\#25-PentodeBlaster\PentodeBlaster_v2E.asc ---