
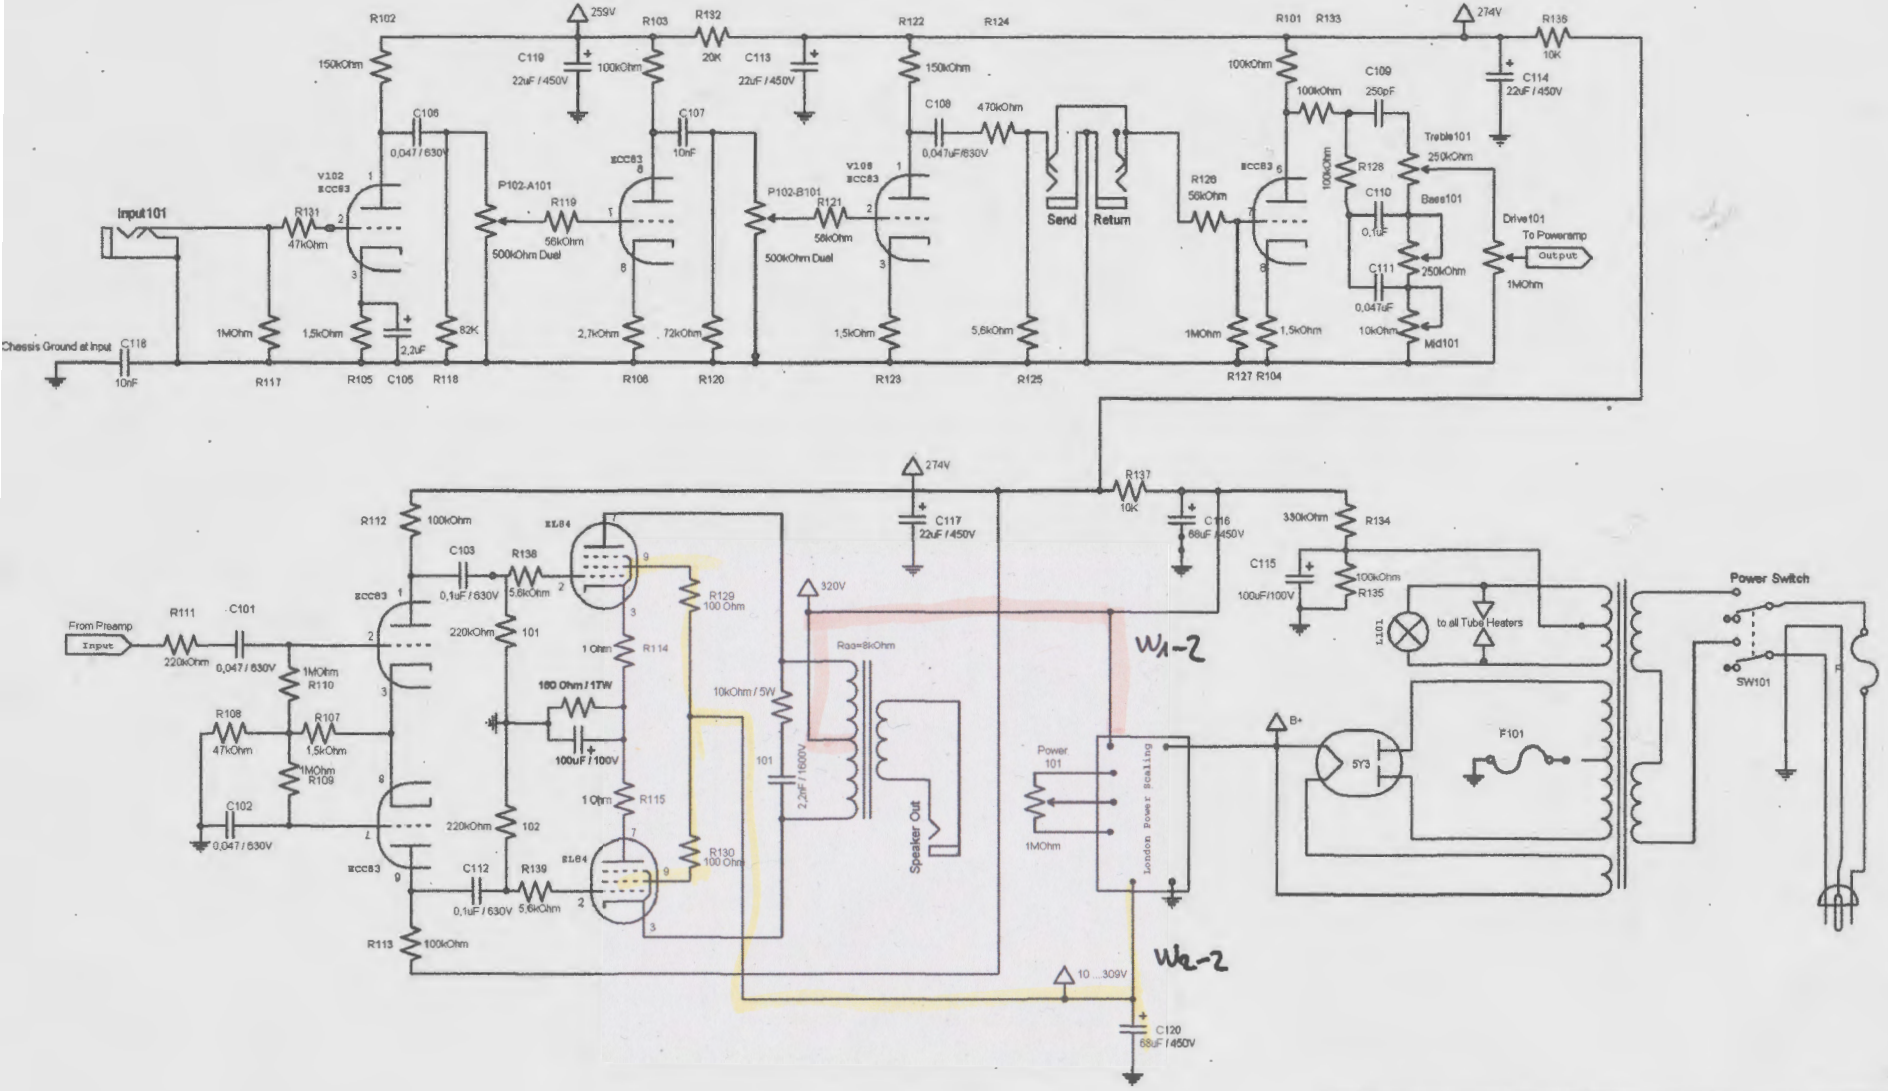



All Voltages measured with 230V Primary Voltage
Capacitors are Mallory 150


Suhr		
Badger 18		
	Ver 1.0 2010-04-26	Seite 1


London Power SV2 Installation


Wipe non-shiny component leads with steel wool before installing and soldering.

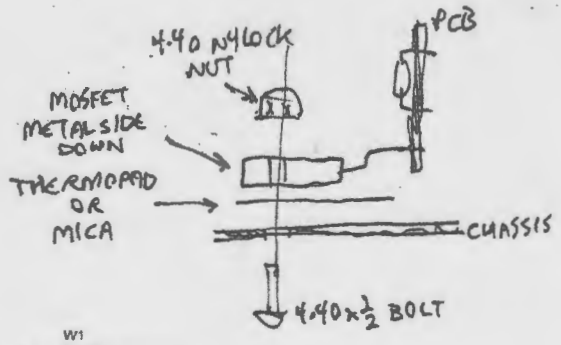


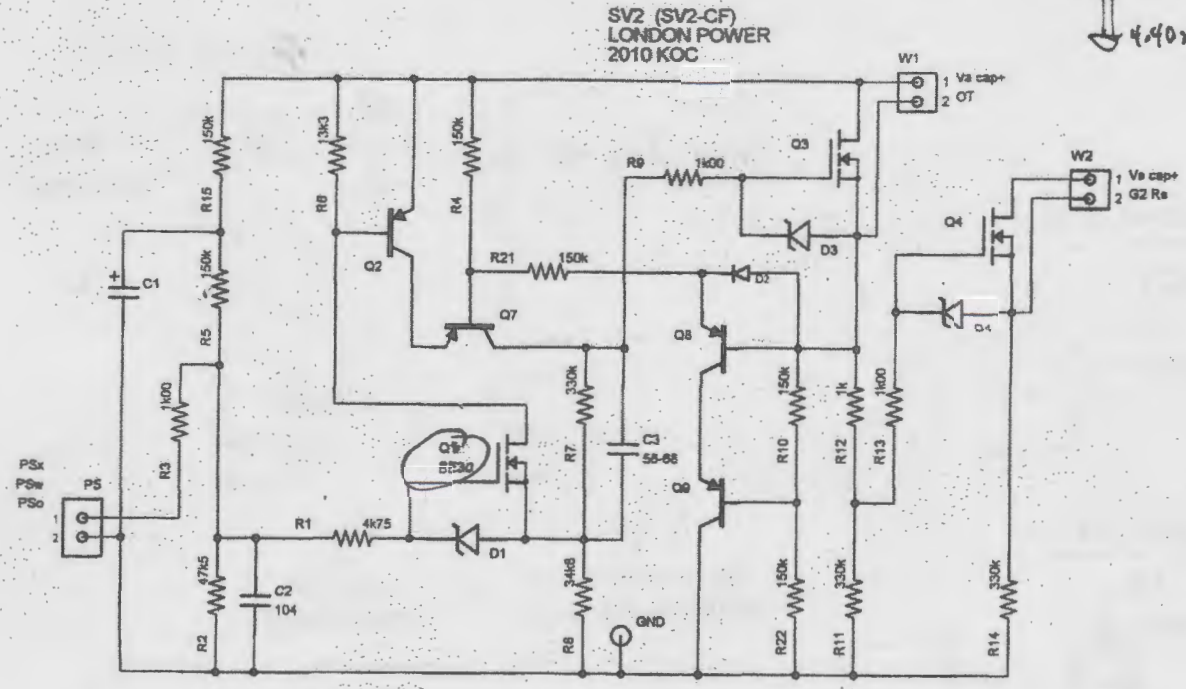





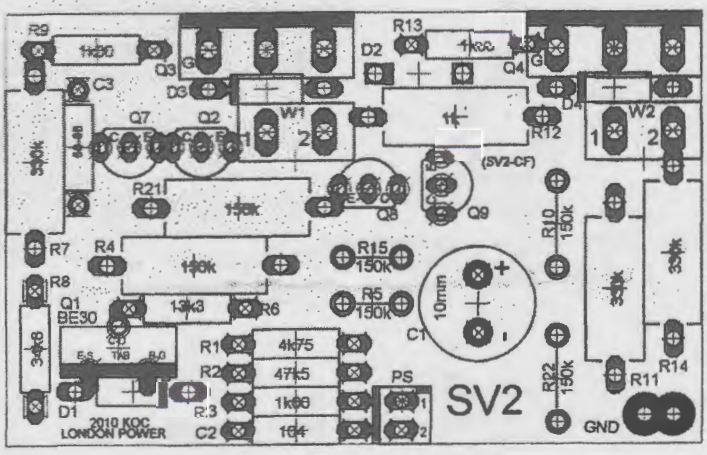


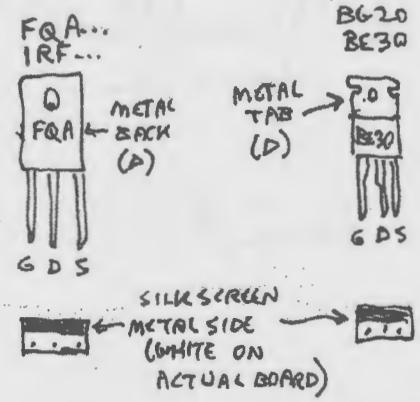


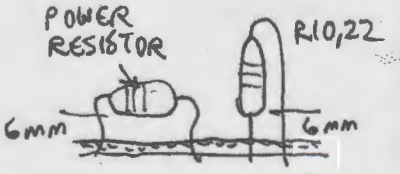


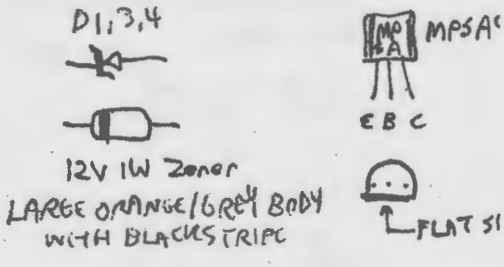


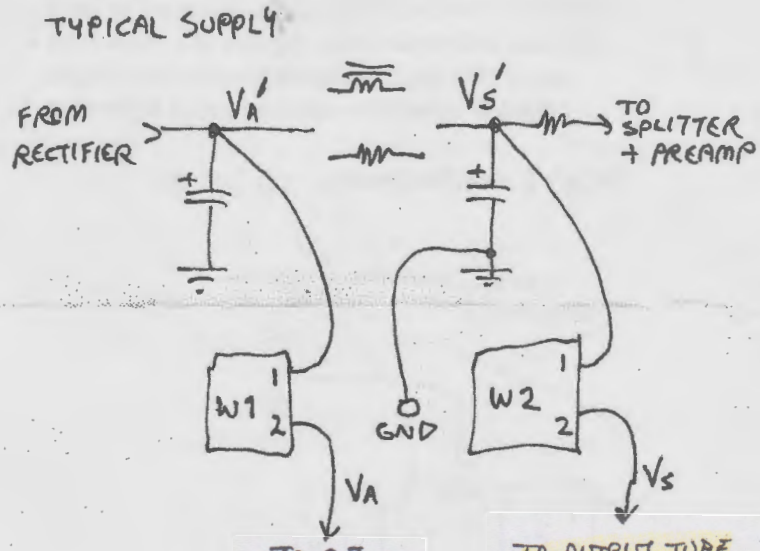

TYPICAL SUPPLY
FROM RECTIFIER
VA'
VS'
TO SPLITTER + PREAMP
W1
W2
GND
VA
VS
TO O.T. CENTERTAP
TO OUTPUT TUBE SCREEN RESISTORS

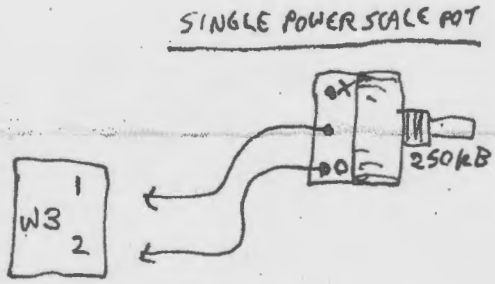

SINGLE POWER SCALE POT
250kB
W3

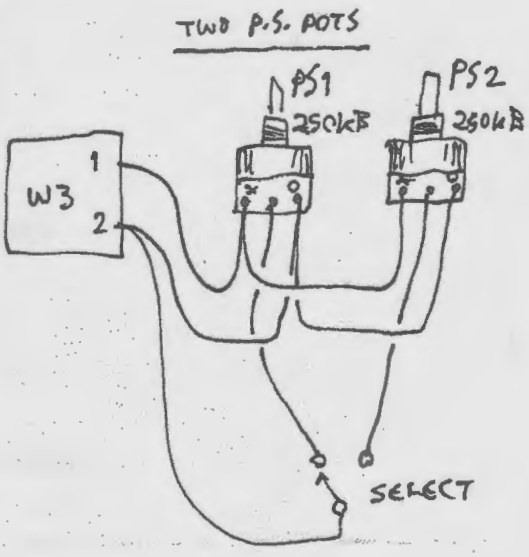
TWO P.S. POTS
PS1
250kB
PS2
250kB
W3
SELECT

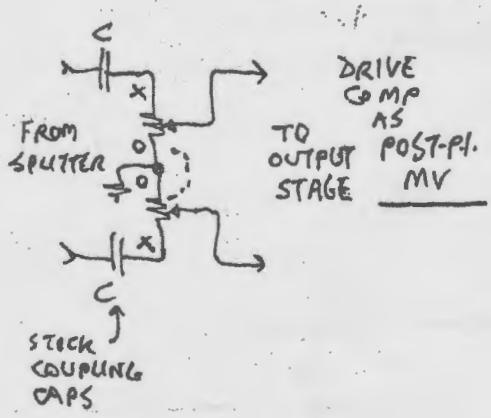
FROM SPLITTER
DRIVE COMP AS POST-PI. MV
TO OUTPUT STAGE
STOCK COUPLING CAPS


DRIVE COMP
SECTION-2
SECTION-1

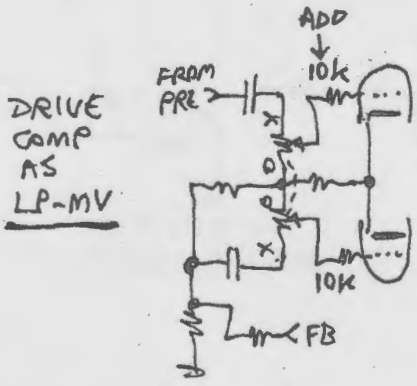
DRIVE COMP AS LP-MV
FROM PRE
ADD
10k
10k
FB

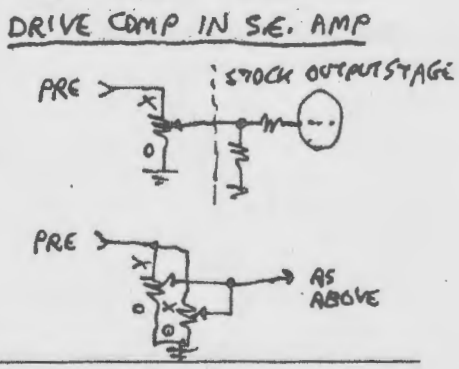
DRIVE COMP IN S.E. AMP
PRE
STOCK OUTPUT STAGE
PRE
AS ABOVE