



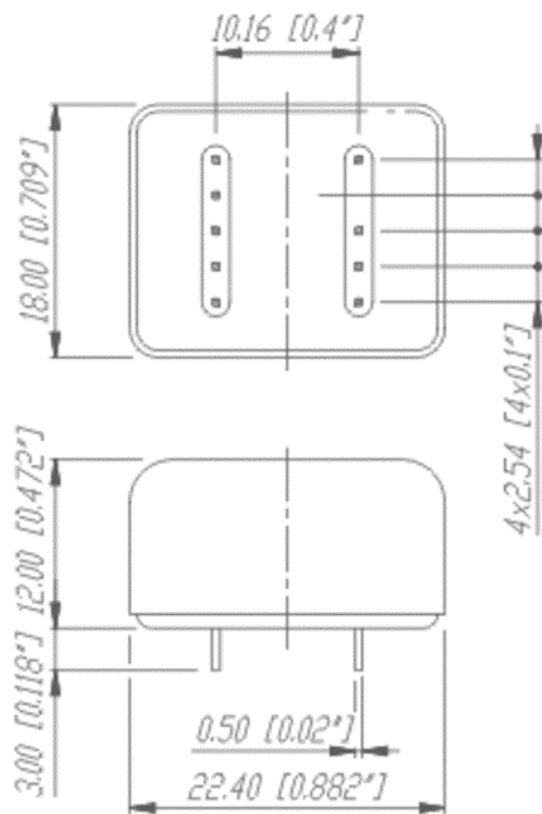









NTM4

Studio Übertrager Mikrofon 1:4
 Eingangs-/ Ausgangsimpedanz in : 200/10K
 Max. Eingangsspannung (1% THD @ 30 Hz): 1.2 V rms

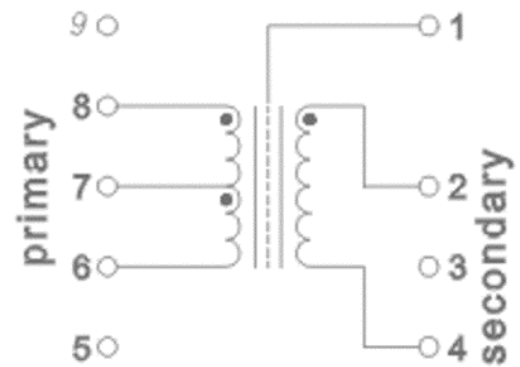

Transformers

	Ripple 20Hz-20kHz	Max. input voltage (@60Hz) THD $\leq 1\%$ THD $\leq 3\%$		Min. load impedance
NTE1	max. -1dB	1,2 V	1,4 V	200 Ω
NTE4	max. -1dB	1,6 V	2,2 V	1 k Ω
NTE10/3	max. -2dB	1,2 V	1,6 V	10 k Ω
	Turns ratio	Winding resistance (DC) primary secondary		Primary inductance at 30Hz
NTL1	1 : 1 $\pm$ 5%	1.1 k $\Omega \pm 5\%$	1.35 k $\Omega \pm 5\%$	≥ 150 H
NTM1	1 : 1 $\pm$ 10%	85 $\Omega \pm 3\%$	105 $\Omega \pm 5\%$	≥ 8 H
NTM4	1 : 4 $\pm$ 10%	105 $\Omega \pm 3\%$	1.25 k $\Omega \pm 5\%$	≥ 8 H

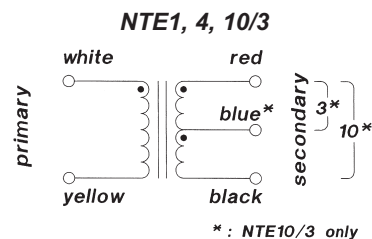

NTL1: typical application

