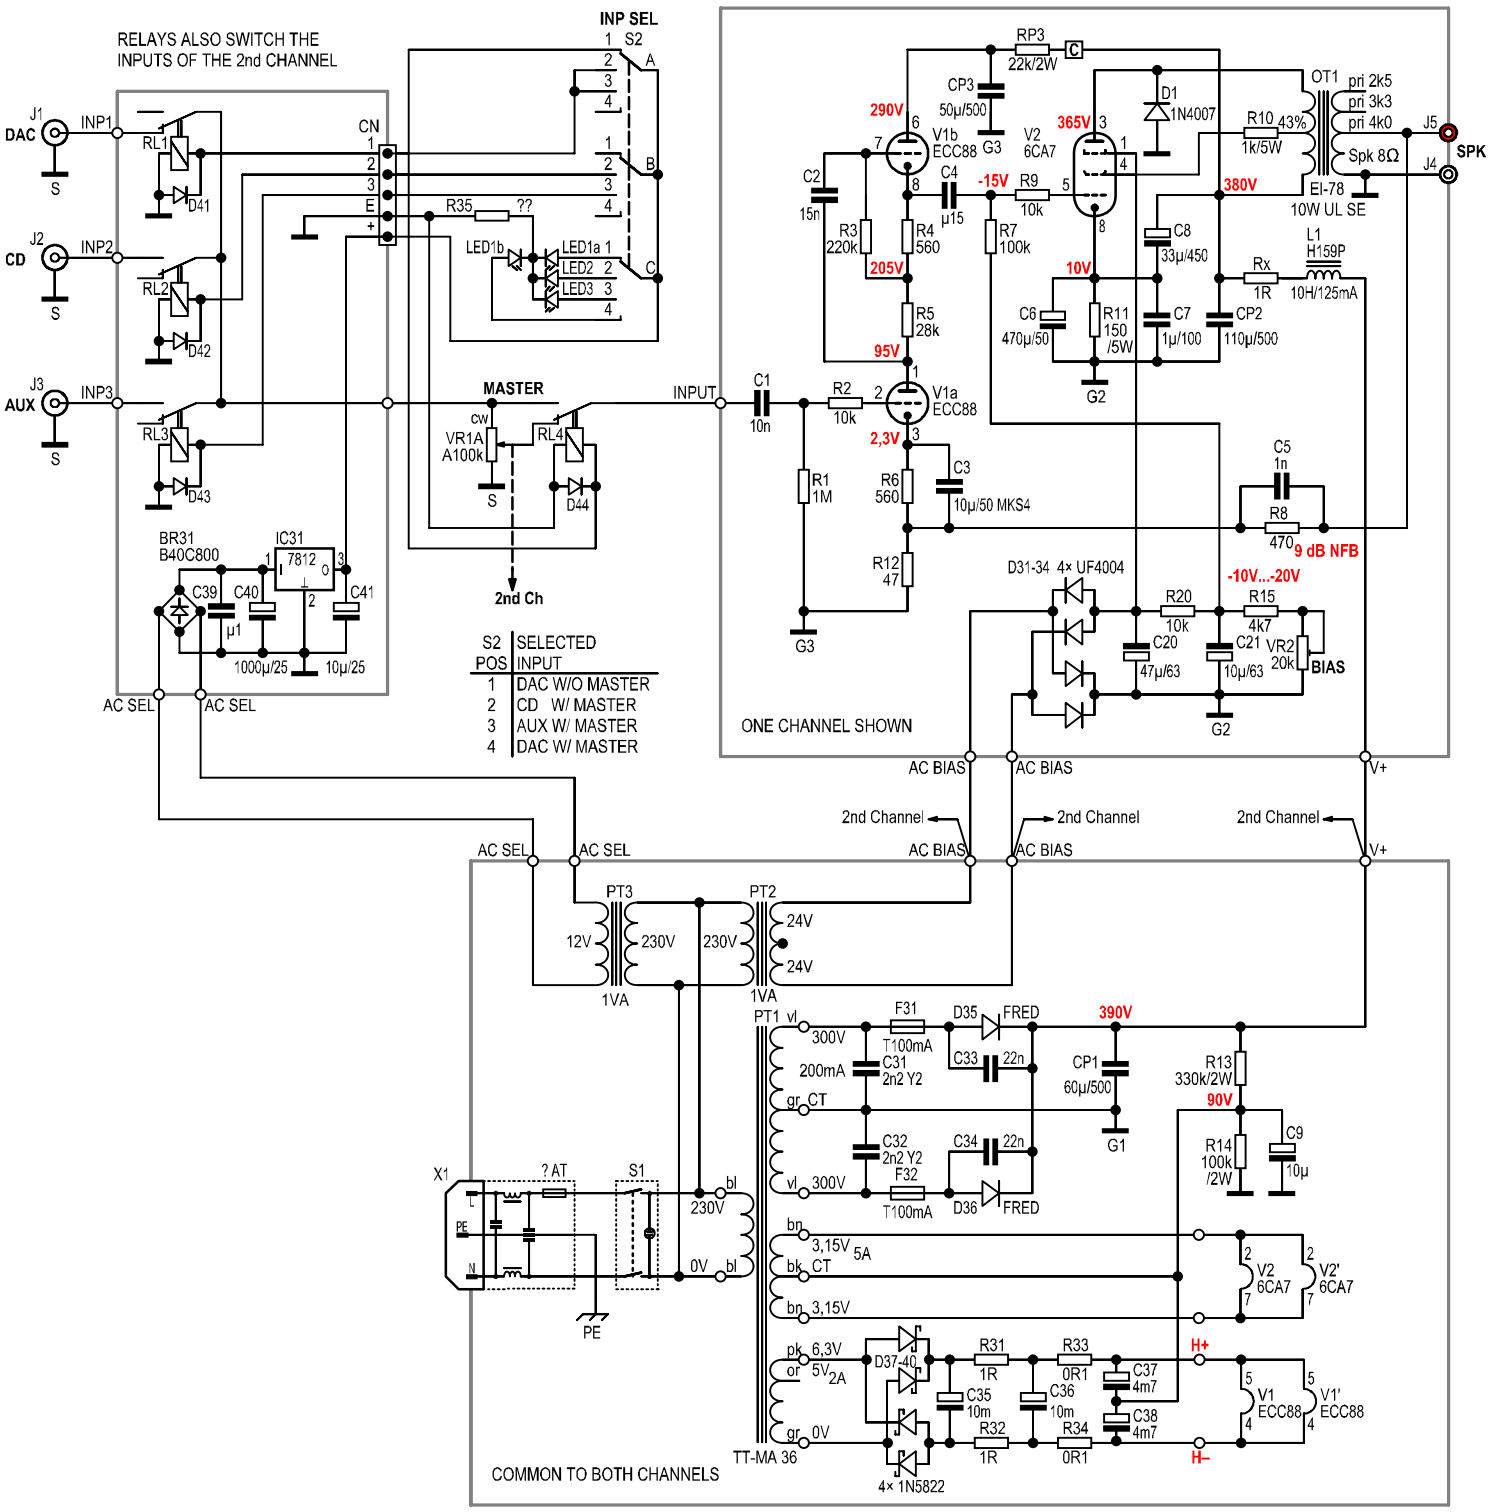

REFERENCE DESIGNATORS OF COMPONENTS
TAKEN FROM LAYOUT PLAN START WITH 3...

ALL FILM CAPS IN PSU 500 V
ALL CAPS MIN. 450V UNLESS SPECIFIED
ALL RESISTORS ARE DALE RN65D UNLESS SPECIFIED

TECHNICAL DATA

SENSITIVITY	1.2 Vrms input @ 7 Wrms output
DISTORTION	0,7% THD @ 1 W output
	2,5% THD @ 7 W output
BANDWIDTH	20 Hz ...> 60 kHz @ 1 W output

V3D

Circuit Diagram	bja 27.02.2020
6CA7 2x 7 W UL SE HiFi Amp	
Laurent @ TTF 03/2019-02/2020	
Rev 1.01	Sheet 1 of 1