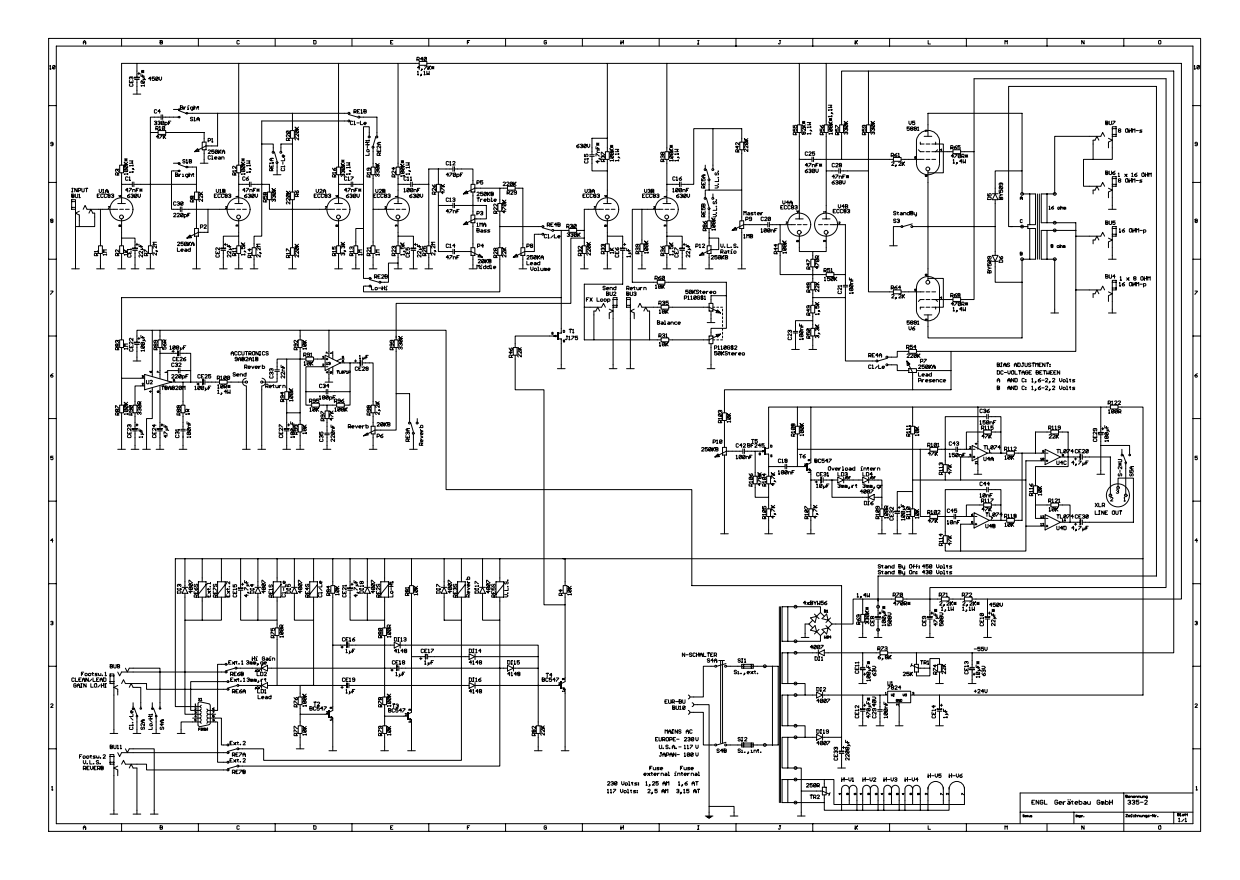

INPUT
Bright
Clean
Lead
Treble
Bass
Middle
Lead Volume
Lead Presence
Send
Return
FX Loop
Balance
Reverb
Tone
Overload Intern
Standby
Master
Volume
Presence
Bias
LINE OUT
Stand By DHH 458 Volts
Stand By Dru 458 Volts
N-SCHALTER
EUR-BUS
MAINS AC
EUROPE- 230V
U.S.A.- 117 V
JAPAN- 100 V
Fuse external 230 Volts 1,25 AM 117 Volts 2,5 AM
Fuse internal 1,4 AT 3,15 AT
ENGL Gerätebau GmbH
Benennung
335-2
Blatt
1/1