


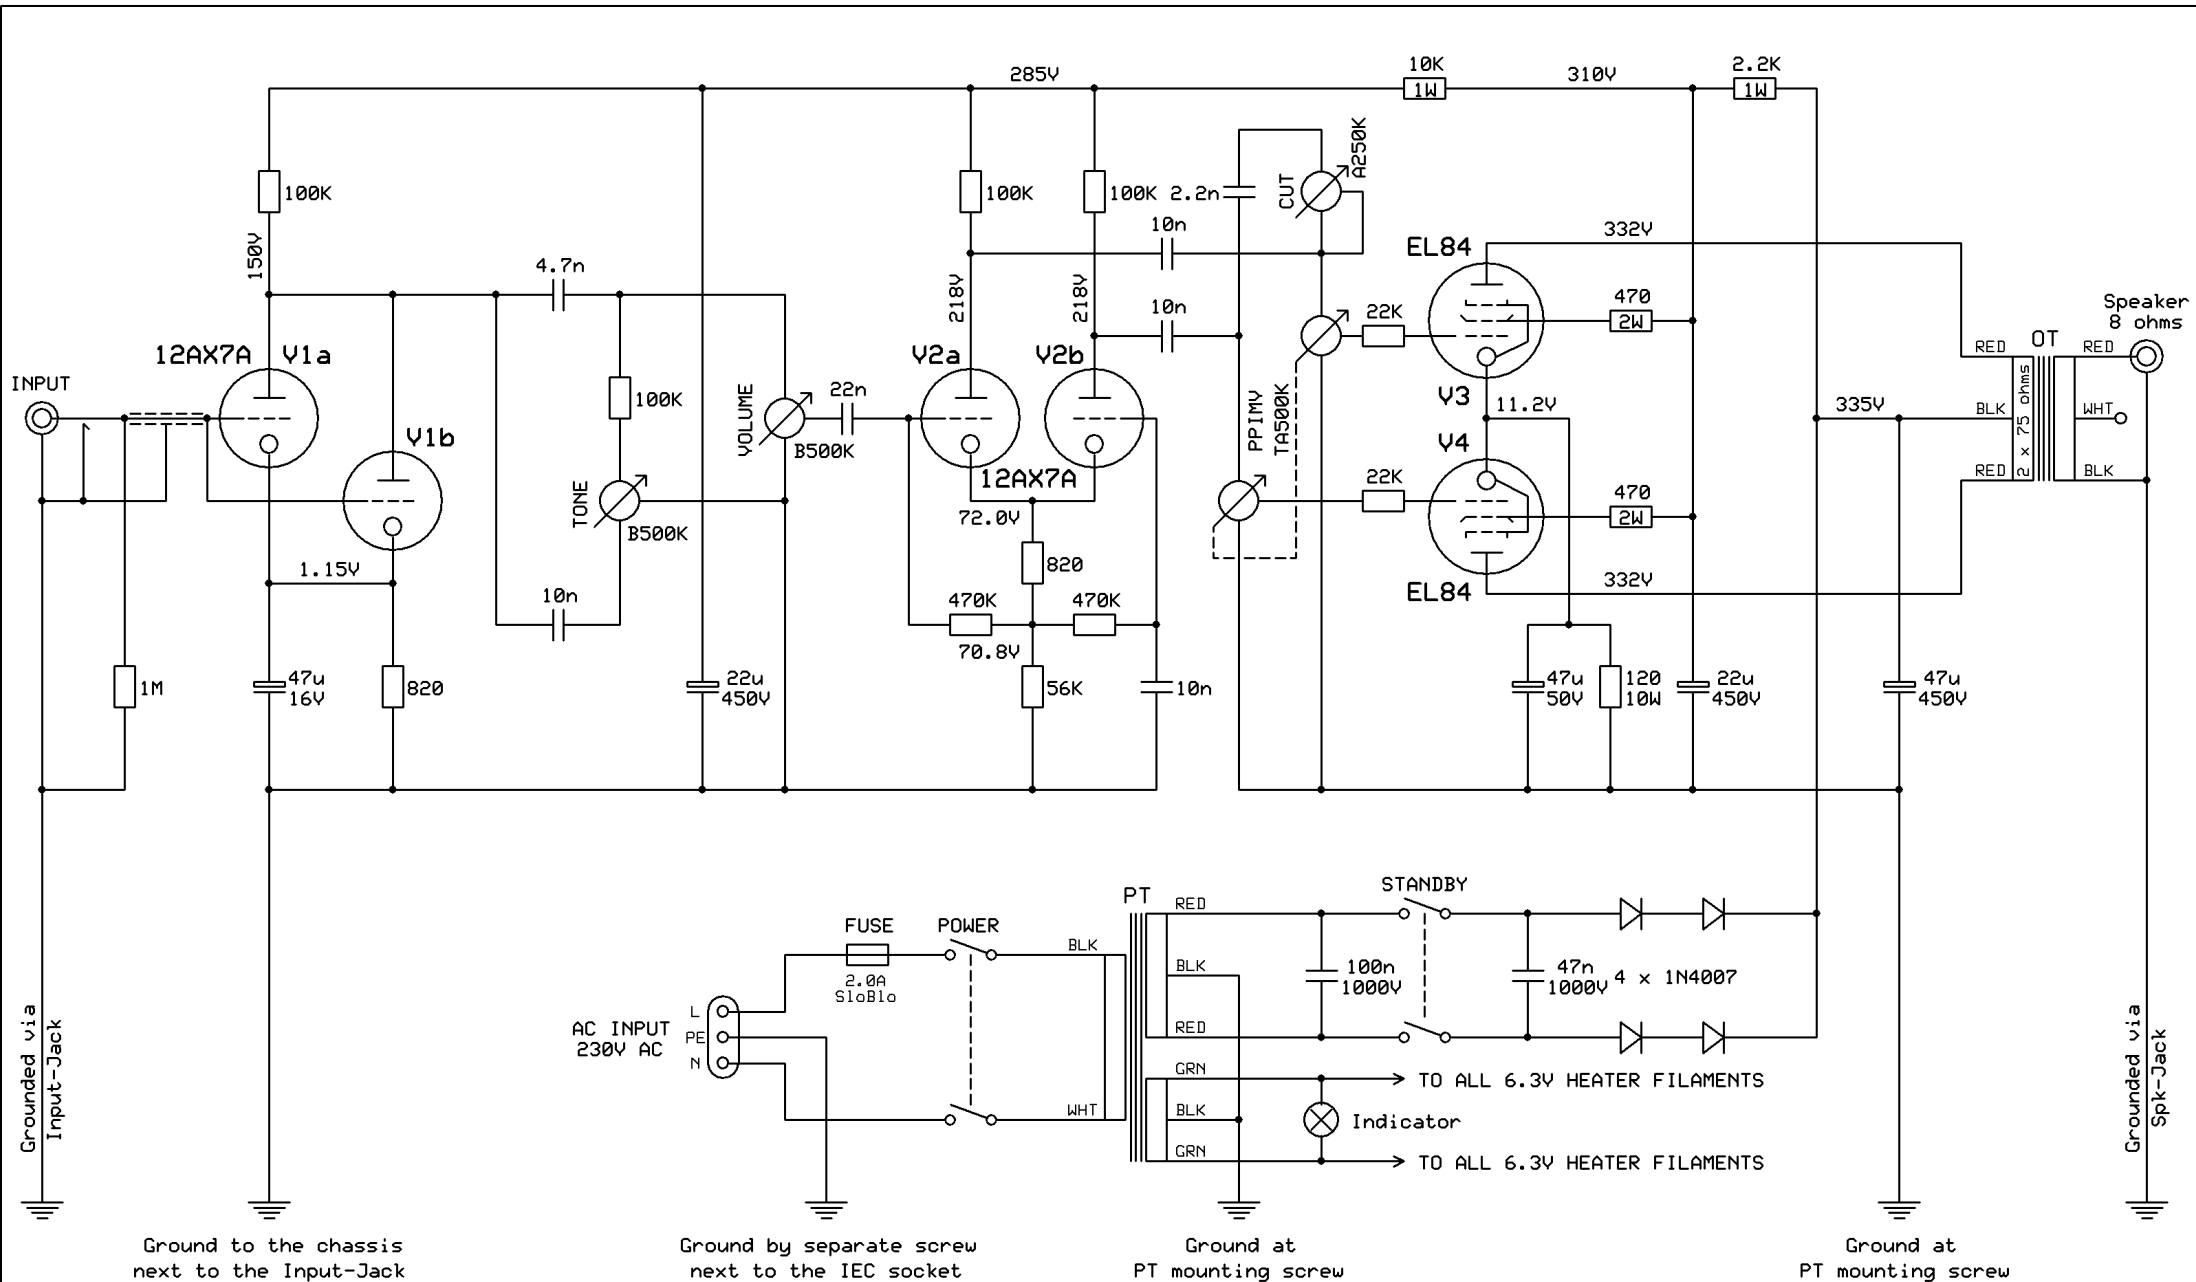

ALL RESISTORS 0.5W - EXCEPT OTHERWISE NOTED

ALL COUPLING CAPS SWAP W/ POLYESTER (MKT) 400V DC

DC VOLTAGE READINGS WITHIN A TOLERANCE OF +5%/-10%

LARRY AMPLIFICATION SMART-20 w/ PPIMV & CUT

Larry Grohmann

Rev 2.0

11.09.2008

Page 1/1