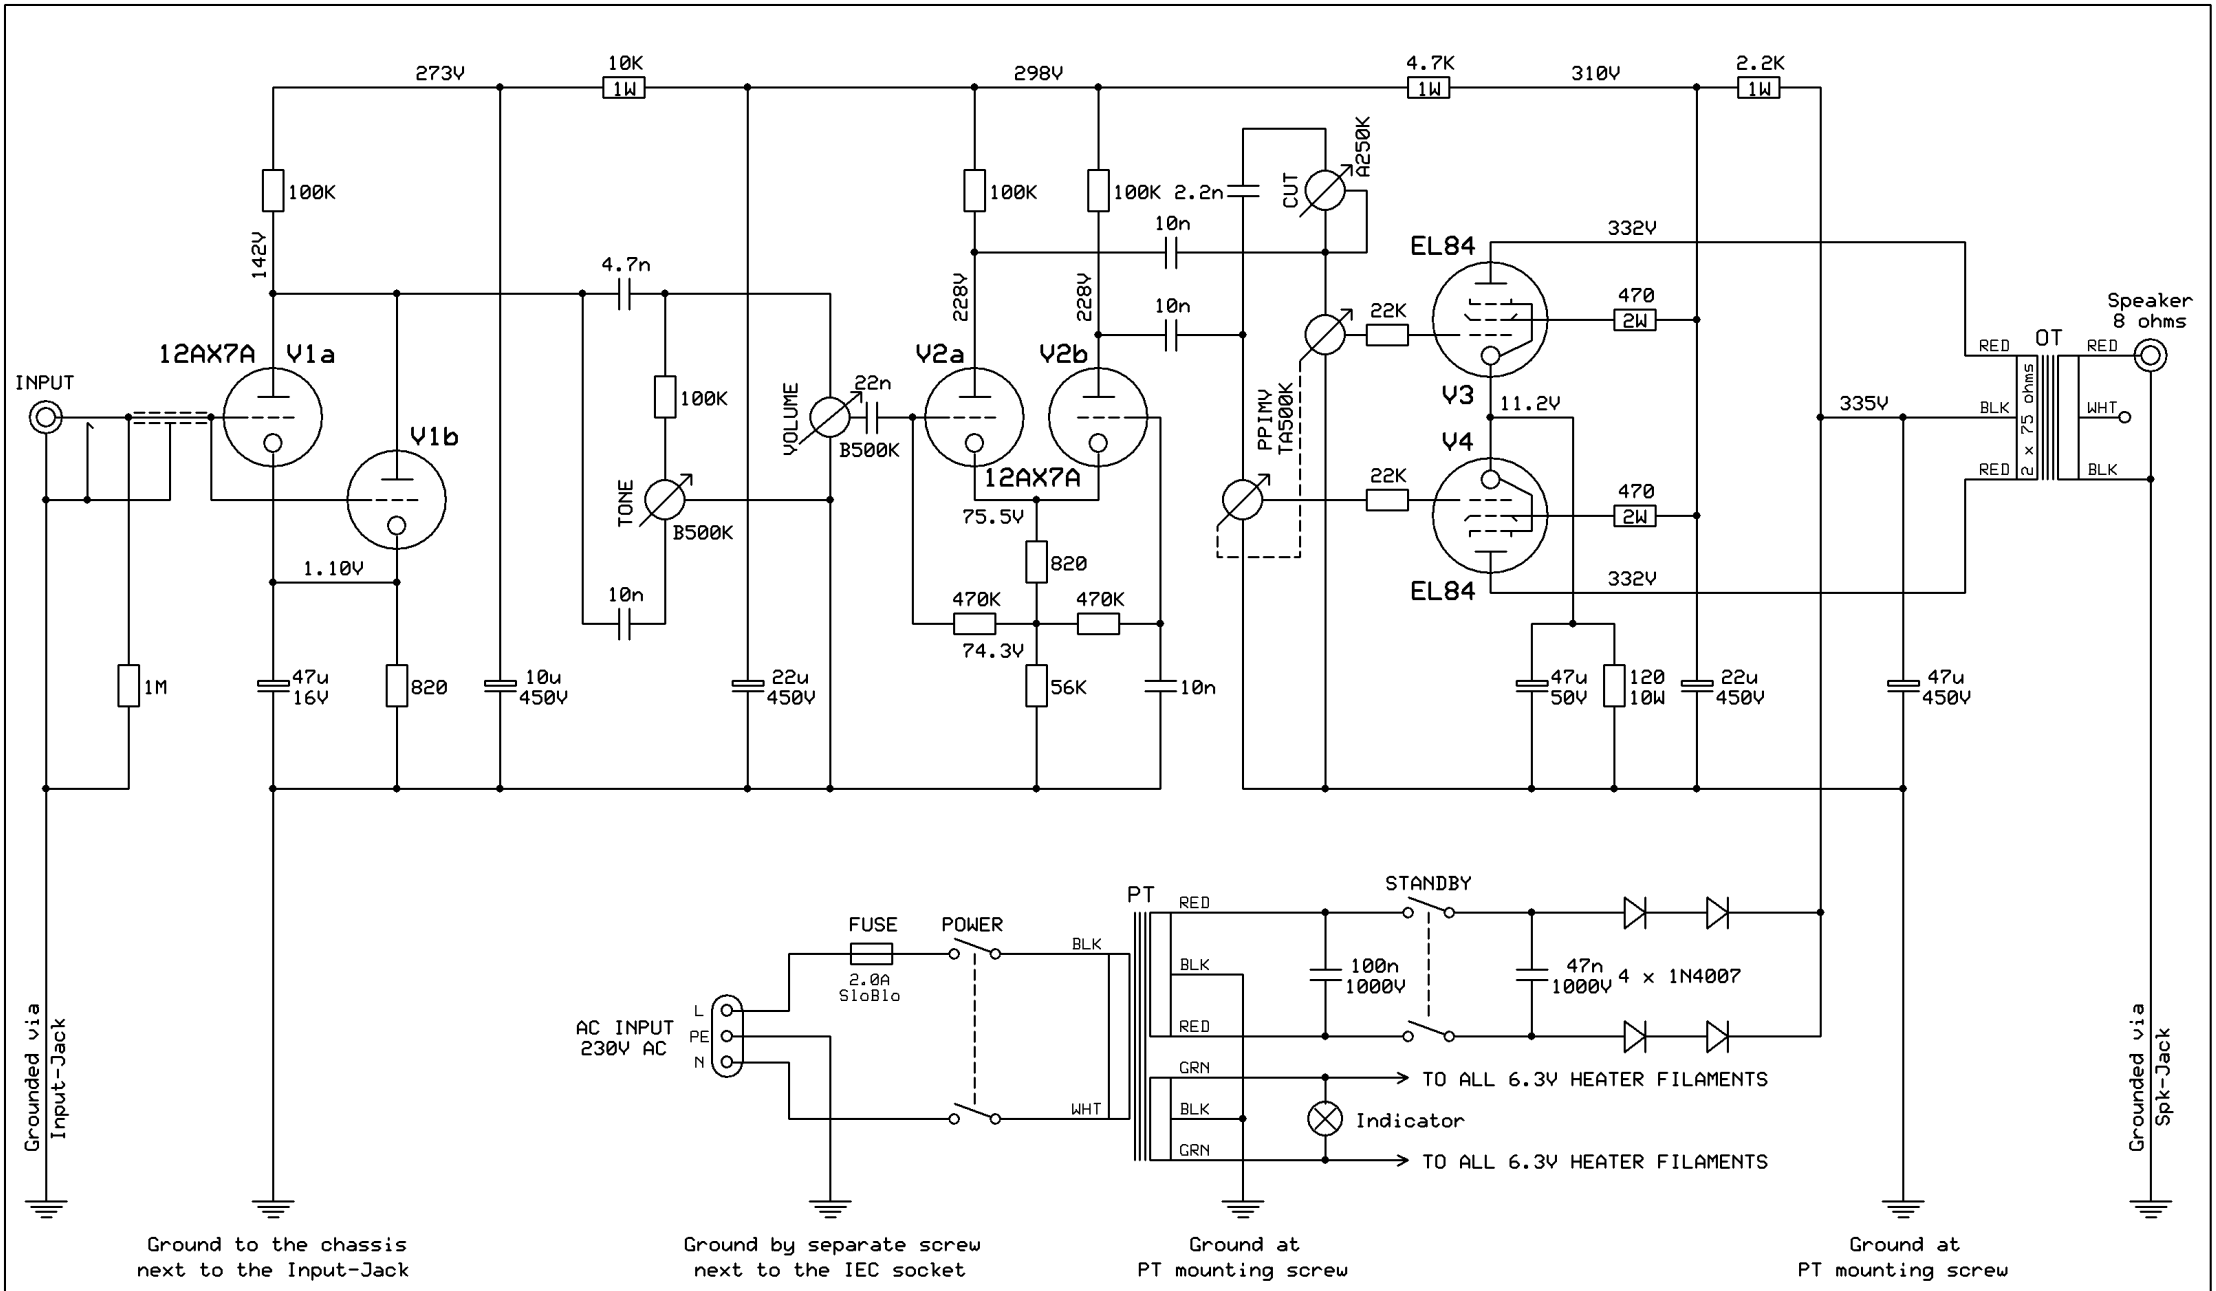

ALL RESISTORS 0.5W - EXCEPT OTHERWISE NOTED

ALL COUPLING CAPS SWAP W/ POLYESTER (MKT) 400V DC

DC VOLTAGE READINGS WITHIN A TOLERANCE OF MAX. 5%

LARRY AMPLIFICATION

SMART-20 w/ PPIMY & CUT

Larry Grohmann	Rev 2.1 11.09.2008	Page 1/1